

Takeoff Summary

Area

4-1/2" CONC. Ressed Slab	208.0 SQFT
4" Granular Fill/	1,281.4 SQFT
5" CONC. Slab	994.4 SQFT
Back Room Area	133.9 SQFT
Ceiling Insulation: Batt R30	277.1 SQFT
CONC. Paving Area	8,507.6 SQFT
CONC. Slab Pits	82.2 SQFT
Earth Work Area	18,840.3 SQFT
EIFS Accent Band	311.6 SQFT
EIFS Main Color Stonebriar	1,021.2 SQFT
EIFS Secondary Color Positive Red	412.2 SQFT
EIFS Wainsscot Sturdy Brown	382.3 SQFT
Landscape Area	9,160.1 SQFT
Office Area	67.9 SQFT
Restroom Area	65.1 SQFT
Rip-Rap	1,113.2 SQFT
Roof Area	1,361.6 SQFT
Suspended ceiling 2' x 4' grid, mineral fiber, reveal edge, 1" thick	315.0 SQFT
Trash Enclosure Slab	138.9 SQFT

Length

(2) 2" PVC Electrical Conduits	76.3 FT
4" PVC Telecom Conduit	67.0 FT
4X8 Header	63.4 FT

Takeoff Summary (cont.)

●● CONC.Curb	571.3 FT
●● Condensate Drain Line	22.2 FT
●● Excavation Trench 10"x2'-6"/Footing	359.0 FT
●● Exterior Wall 2x6 studs @ 16" O.C- F1	167.6 FT
●● Exterior Wall 2x6 studs @ 16" O.C- F2	58.5 FT
●● Floor Heigth	37.1 FT
●● Interior Wall 2x6 studs @ 16" O.C- F1	38.6 FT
●● Interior Wall 2x6 studs @ 16" O.C- F2	27.5 FT
●● Lube Trench Edge	51.6 FT
●● Pre-finished Galvanized Metal Coping.	158.1 FT
●● Refrigerant Piping	29.3 FT
●● Removal- Curb	88.5 FT
●● Removal- Electrical Wire	252.7 FT
●● Removal- Gutter	39.3 FT
●● Trash Enclosure CONC. Footing	41.3 FT

Count


1" HDPE Water Service, 53 LF	1 EA
1" Irrigation Master Valve	2 EA
1" Water Meter And Box	1 EA
12" flared end section with trash grate	1 EA
12" RCP 50LF	1 EA
12" RCP 54LF	1 EA
24" DIA. Nyloplast Drain Basin	2 EA
4x5 Downspout	2 EA

Takeoff Summary (cont.)

 6" Dia CONC. Filled Pipe Bollard	3 EA
 6x12 Overflow Scupper	4 EA
 8" HDPE 19LF	1 EA
 ACO Traffic Power Drain S300K, 30FI	1 EA
 Blind connect new private 6" PVC SDR 26	1 EA
 CF-1	1 EA
 CF-2	1 EA
 Cleanout	1 EA
 CONC. Pad for HVAC Equipment	1 EA
 CU-1	2 EA
 DS-1	2 EA
 EF-1	1 EA
 EF-2	1 EA
 EF-3	1 EA
 EUH-1	1 EA
 EUH-2	1 EA
 EWH-1	1 EA
 EWH-2	1 EA
 Irrigation Backflow Preventor Installed	1 EA
 Private 6" PVC SDR 26, 5 LF	1 EA
 Private 6" PVC SDR 26, 55 LF	1 EA
 Removal- Area Light	1 EA
 Removal- PVC Pipe	1 EA
 Site Light	3 EA
 Temporary CONC. Washout Facility	1 EA

Takeoff Summary (cont.)

✓ TG-1

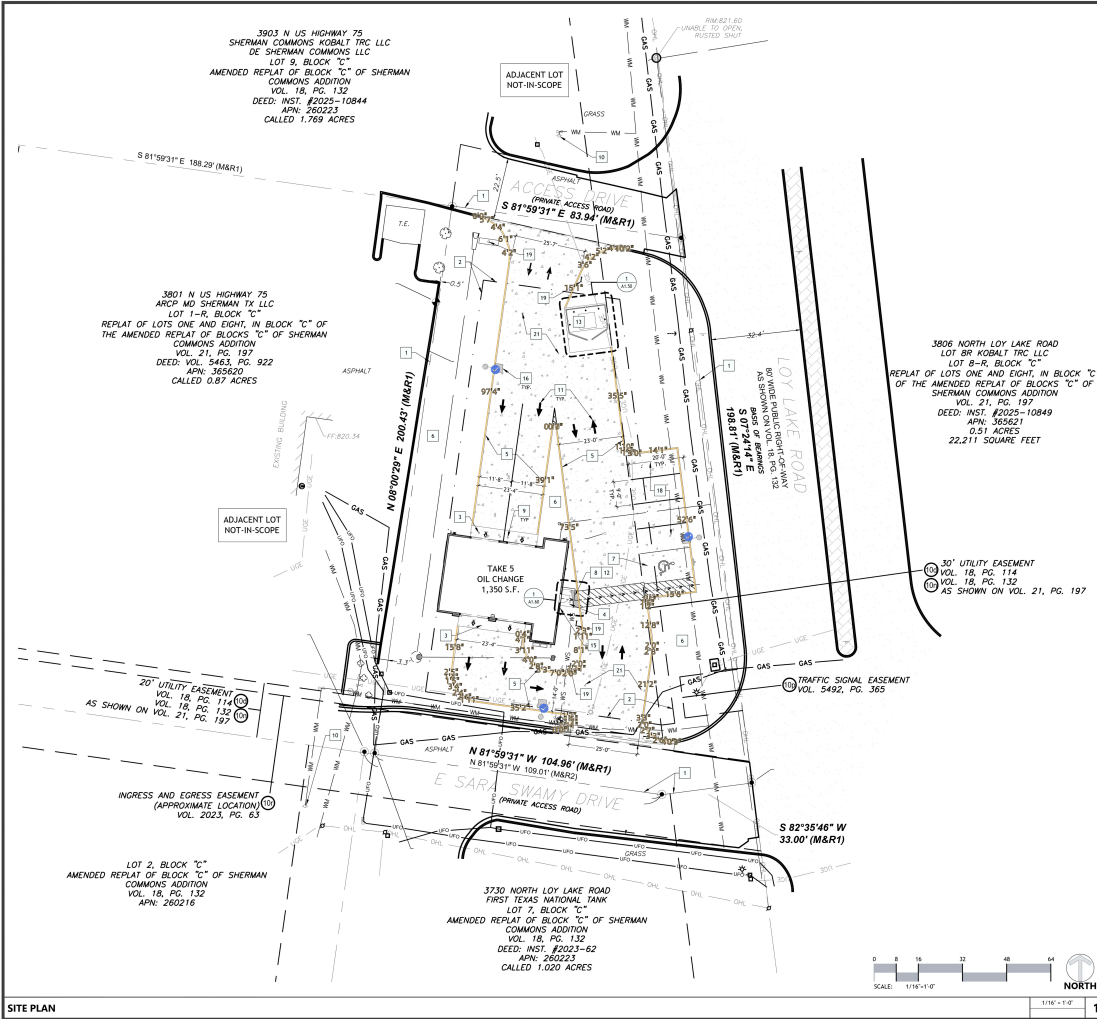

KEYNOTE DESCRIPTION	NOTE: ALL ITEMS ARE NEW UNLESS NOTED OTHERWISE
1. PROPERTY LINE.	
2. SET BACK LINE SHOWN DASHED.	
3. CONCRETE APRON @ ENTRY/ EXIT SERVICE BAY - REFER TO CIVIL DWGS.	
4. CONCRETE WALKWAY - REFER TO CIVIL DWGS.	
5. CONCRETE CURB - REFER TO CIVIL DWGS.	
6. LANDSCAPE AREA - REFER TO LANDSCAPE DWGS.	
7. VAN ACCESSIBLE STALL, SIGNS, ACCESSIBLE ASLE - REFER TO DETAILS 12/A0.10, 4/A0.10 & CIVIL DWGS.	
8. CURB RAMP - SEE DETAIL 15/A0.10 - REFER TO CIVIL DWGS.	
9. 6" DIA. STEEL PIPE BOLLARD FILLED W/ CONC. REFER TO DETAIL 8/A1.50.	
10. (E) FIRE HYDRANT.	
11. PAVEMENT MARKINGS - REFER TO CIVIL DWGS PER SEPARATE SUBMITTAL.	
12. DETECTABLE WARNING SURFACE W/ TRUNCATED DOMES - REFER TO 2/A0.10.	
13. TRASH ENCLOSURE.	
14. NOT USED.	
15. KNOX BOX PER JURISDICTION FIRE DEPT. REQUIREMENTS. THE FIRE DEPT. ALERT DECAL IS TO BE MOUNTED ON THE DOOR OR FRAME OF BUILDING MAIN ENTRANCE. KEYS TO BE PLACED INTO THE KNOX BOX WILL BE DETERMINED BY JURISDICTION FIRE PREVENTION STAFF - SEE 4/A0.80 FOR LOCATION.	
16. (N) SITE LIGHTING - REFER TO 18/A1.50 & ELEC. DWGS & CIVIL DWGS.	
17. NOT USED.	
18. STANDARD PARKING STALL - REFER TO CIVIL DWGS.	
19. SIGNAGE BY OTHERS. GC - SEE SIGN PAGE FOR ADDITIONAL INFORMATION.	
20. (N) MONUMENT SIGN. "UNDER SEPARATE PERMIT. REFER TO ELEC DWG FOR POWER TO SIGN LOCATION. REFER TO GENERAL NOTE #4.	
21. ASPHALT PAVING AT DRIVE AISLES, REFER TO CIVIL DWGS.	
SITE PLAN KEYNOTES	
1. ALL SITE LIGHTING SHALL BE SHIELDED TO PREVENT GLARE ON NEIGHBORING PROPERTIES.	
2. GREEN WASTE/ GRASS CLIPPINGS WILL BE RECYCLED AND NOT DISPOSED OF IN LANDFILL.	
3. REFER TO CIVIL PLANS FOR ALL HORIZONTAL CONTROL DIMENSIONS.	
4. ELECTRICAL CONNECTION TO Pylon OR MONUMENT SIGNAGE SHALL BE PROVIDED BY THE GENERAL CONTRACTOR.	
GENERAL NOTES	
PROPERTY LINE	
EASEMENT/SETBACK LINE	
ACCESSIBLE PATH OF TRAVEL, PROVIDE THE FOLLOWING:	
• 48" MIN. CLEAR WIDTH PATH OF TRAVEL	
• 5% MAX. SLOPE	
• 2% MAX. CROSS SLOPE	
ACCESSIBLE PARKING	
(N) SITE LIGHTING	
LANDSCAPE	
CONCRETE AT DRIVEWAY APRON	
CONCRETE AT SIDEWALK	
AREA OF EASEMENT	
SYMBOLS LEGEND	

Length

Count

Site Light


3EA

CONC.Curb


571.3FT




1. CLASS 1 LIQUIDS ARE NOT STORED IN TAKE 5 BUILDINGS. 2. CLASS 1B LIQUID (MOTOR OIL) IS STORED IN THE SIDE REPAIR AREA WHICH IS VENTILATED AS REQUIRED. SEE MECHANICAL SHEETS. 3. NO LIQUIDS ARE STORED IN THE LUBE TRENCHES. 4. VEHICLES ARE OPERATED ONLY FOR THE DURATION OF MOVING THEM INTO AND OUT OF THE BUILDING.	12" WIRE SHELVING TO BE "CLOSETMAID" - SUPERSLIDE" OR EQUAL, ON ADJUSTABLE MOUNT HARDWARE W/ VERT. STANDARDS AT 24" O.C. MAX. SPACING. 16" WIRE SHELVING TO BE "CLOSETMAID" - MAX LOAD" OR EQUAL, ON HEAVY DUTY "MAX LOAD" ADJUSTABLE MOUNT HARDWARE W/ VERT. STANDARDS AT 24" O.C. MAX. SPACING. CLOSET ROD TO BE "CLOSETMAID" EPOXY COATED STEEL "SUPER SLIDE SYSTEM" W/ CORNER ROUNDER BAR. SUPPORTS TO BE HEAVY DUTY METAL "J" BRACKETS. PROVIDE CLOSET ROD END CAPS AT EACH END. ALL FINISHES TO BE BRUSHED CHROME.	1. DIMENSIONS AS NOTED IN THE DWGS. ARE TO THE FACE OF STUD, U.N.O. 2. REFER TO MECHANICAL, PLUMBING, FIRE SUPPRESSION, AND ELECTRICAL DWGS. FOR ALL EQUIPMENT LOCATIONS DIMENSIONS, AND OTHER REQUIREMENTS. 3. WHERE FLOORING MATERIALS CHANGE, THE CHANGE IS TO OCCUR AT THE CENTERLINE OF THE DOOR. FLOAT FLOOR AS REQUIRED PRIOR TO INSTALLATION OF FLOOR COVERING. 4. MAINTAIN A MINIMUM OF 48" CLEAR UNOBSTRUCTED EMERGENCY EXIT ASIDE TO DESIGNATED EOTS. 5. PROVIDE LEVEL FLOOR OR LANDING ON EACH SIDE OF ALL DOORS. THRESHOLD SHALL BE LESS THAN 1/2" HIGH & BEVELED 1:2. 6. EXTERIOR FACE OF FRAMING SHALL ALIGN WITH EXTERIOR EDGE OF CONC. SLAB & CONC. CURB.	KEYNOTE DESCRIPTION 1. CONC. SLAB, 1/4" PER FT. MIN. SLOPE TO LUBE TRENCH REFER TO STRUCT. DWGS. 2. CONC. APRON, REFER TO CIVIL DWGS AND SOILS REPORT. 3. 2" RECESSED SLAB AT OIL TANK AREA, REFER TO STRUCT. DWGS. 4. ELECTRICAL METER, REFER TO ELEC. DWGS. 5. WATER METER & BACKFLOW PREVENTER, REFER TO PLUMB. DWGS. 6. NOT USED 7. AIR COMPRESSOR 8. THRU-WALL EXHAUST FAN, REFER TO MECH. DWGS. 9. WASHER FLUID TANK. 10. COOLANT TANK. 11. UTILITY SINK, REFER TO PLUMB. DWGS. PROVIDE FRP TO 48" A.F.F. AT ADJACENT WALLS. 12. OIL INTERCEPTOR (RECESSED), REFER TO PLUMB. DWGS. 13. 44"x27" USED OIL STEEL TANK. 14. 36"x36" NEW OIL POLY TANK. 15. 3" DIA. PVC LINE UNDER SLAB. USE SWEEP AT TURNS. 16. 1" PVC STUB UP, REFER TO PLUMB. DWGS. 17. 6" CONC. FILLED PIPE BOLLARD, REFER TO DET. 8/A1.50 18. 4" DOWNSPOUT. 19. LUBE TRENCH, REFER TO 7/A2.30 & STRUCT. DWGS. 20. SMART SAFE. 21. TACTILE EXIT SIGNAGE, REFER TO DET. 7/A0.11 22. ATTIC LADDER, WERNER RAH210 22.5"Wx54"Lx8-11"H. G.C. TO CONFIRM 20"x30" MIN. CLK. AT ACCESS OPENING. 23. (3) 1/4" WIRE BACK SHELVES ABOVE COMPRESSOR TANK MOUNTED AT 14" O.C. VERT. 24. CONDENSING UNIT FOR SPLIT-SYSTEM HEATPUMP @ OFFICE. REFER TO MECH. DWGS. 25. (3) SHELVES OVER DOOR AT 4" O.C. VERT. 26. PLUMBING FIXTURE, REFER TO PLUMBING DWGS. 27. FIRE EXTINGUISHER, REFER TO LEGEND BELOW. 28. REFRIG. ON PLATFORM W. SHELVES ABOVE, REFER TO DET. 16/A2.20. 29. FURNITURE, BY OTHERS. 30. OVERHEAD SECTIONAL DOOR, REFER TO DOOR SCHEDULE. 31. 18" DEEP SHELVING; (3) SHELVES @ 14" O.C. VERT. 32. 42"x124" WALL W/ 1/4" WD. CAP. REFER TO DET. 10/A7.00 33. 3/4" PLYWOOD DECK. 34. WALL HEATER, REFER TO MECH DWGS. 35. 6"x6" CONC. CURB AT SIDES OF DEPRESSIONED SLAB. 36. 4" CONDUIT FOR INTERNET CONNECTION. 37. TELEPHONE BOARD, REFER TO ELEC. DWGS. 38. ELECTRICAL PANEL, REFER TO ELEC. DWGS. 39. INSTANTANEOUS WATER HEATER, REFER TO PLUMB. DWGS. 40. HOSE BIB, REFER TO PLUMB. DWGS. 41. GAS METER, REFER TO PLUMB. DWGS. 42. (4) 4-1/2" DIA. STEEL SAFETY BOLLARDS EQUALLY SPACED, SURFACE MOUNTED, 36" HIGH PAINTED SAFETY YELLOW.
OPERATIONAL NOTES	WIRE SHELVING NOTES	GENERAL NOTES	

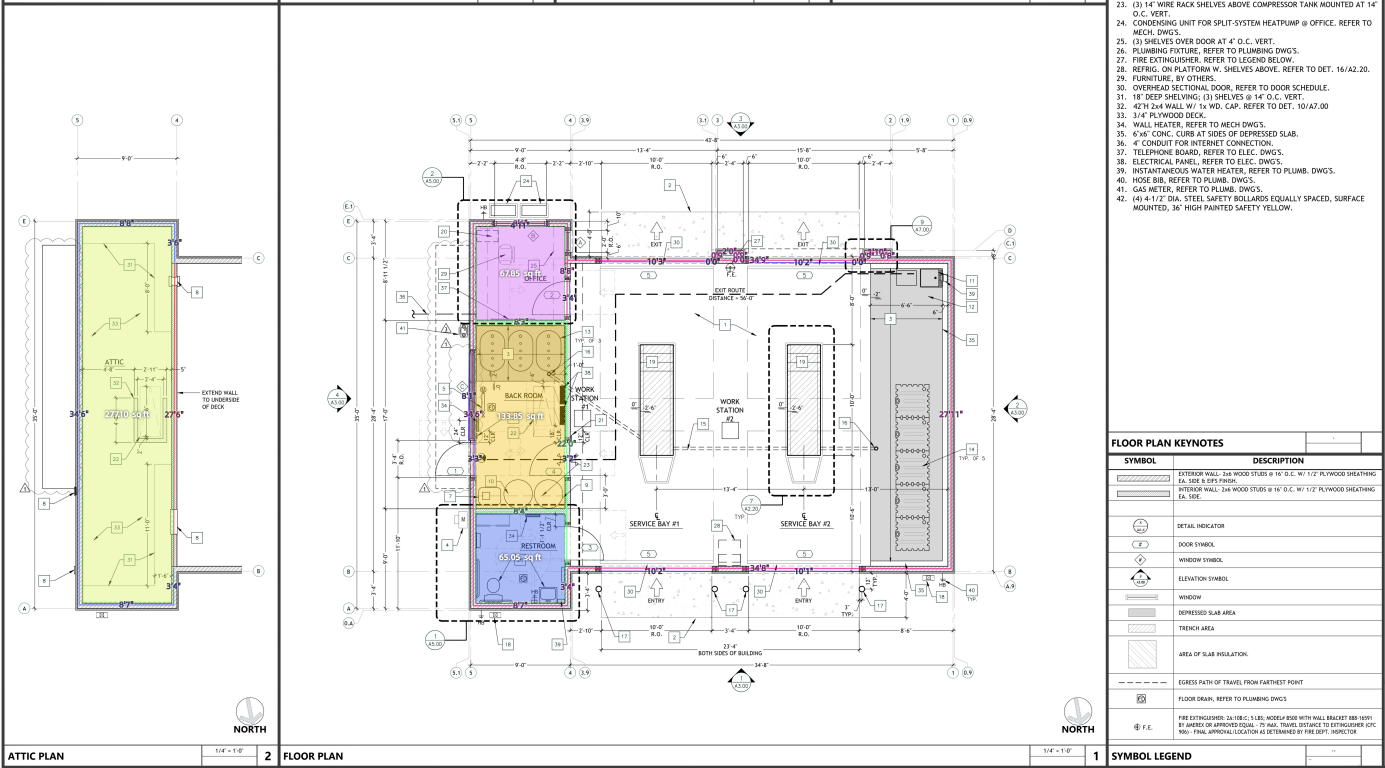

Area Length	277.1SQFT 67.9SQFT 133.9SQFT 65.1SQFT 167.6FT	Exterior Wall 2x6 studs @ 16" O.C- F2 Interior Wall 2x6 studs @ 16" O.C- F1 Interior Wall 2x6 studs @ 16" O.C- F2 4X8 Header	58.5FT 38.6FT 27.5FT 63.4FT
Ceiling Insulation: Batt R30 Office Area Back Room Area Restroom Area Exterior Wall 2x6 studs @ 16" O.C- F1			




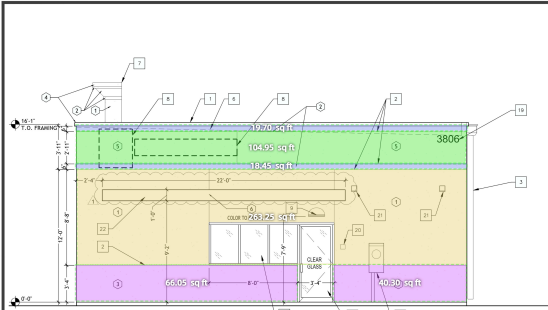

EAST ELEVATION

1/4" = 1'-0"


4

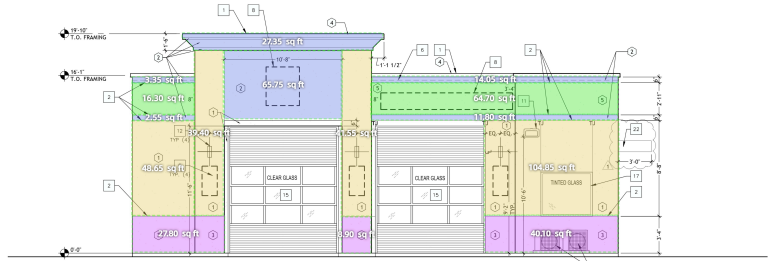

SOUTH ELEVATION

1/4" = 1'-0"


3

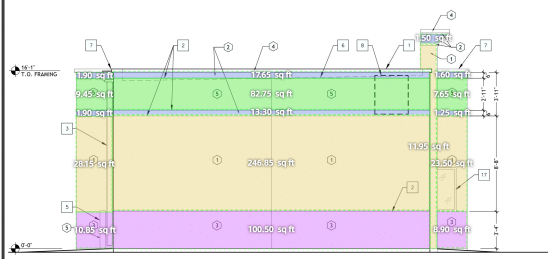

WEST ELEVATION

1/4" = 1'-0"

2

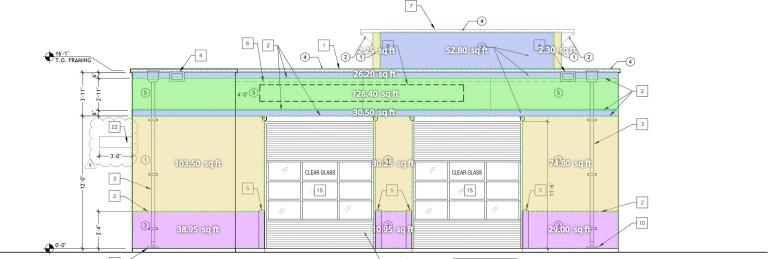

NORTH ELEVATION

1/4" = 1'-0"

1

KEYNOTE DESCRIPTION

1. PREFINISHED GALV. MTL. COPING.
2. V-JOINT IN EIFS REFER TO DET. 2/47.00
3. PREFINISHED DARK BRONZE MTL. DOWNSPOUT AND LEADERHEAD W/ (3) STRAP ANCHORS PER D.S., REFER TO DET. 1/147.00
4. PREFINISHED DARK BRONZE MTL. OVERFLOW SCUPPER. REFER TO DET. 1/247.00
5. 6" DIA. CONC. FILLED PIPE BOLLARD. REFER TO DET. 8/41.50
6. ROOF LINE BEYOND.
7. BUILDING BEYOND.
8. SIGNAGE, BY OTHERS.
9. WALL PACK LIGHTING. REFER TO ELEC. DWG'S.
10. 1/2" SPLASHBLOCK OR CONNECT TO STORM DRAIN. REFER TO CIVIL DWG'S.
11. LED LIGHT FIXTURE. REFER TO ELEC. DWG'S.
12. SOUNDC LIGHTING. REFER TO ELEC. DWG'S.
13. ELEC. PANEL & METER. PAINT DARK BRONZE. REFER TO ELEC. DWG'S.
14. NOT USED.
15. METAL ROLL-UP DOOR. REFER TO DOOR SCHEDULE A6.00.
16. CONDENSING UNIT FOR SPLIT-SYSTEM HEAT PUMP. REFER TO MECH. DWG'S.
17. WINDOW. REFER TO WINDOWS SCHEDULE A6.00.
18. STOREFRONT DOOR. REFER TO DOOR SCHEDULE A6.00.

19. BUILDING ADDRESS SHALL BE PLAINLY LEGIBLE AND VISIBLE FROM THE STREET FRONTING THE PROPERTY. MIN. 6" HIGH NUMBERS SHALL CONTRAST WITH THEIR BACKGROUND. REFER TO SHERMAN, TX FIRE PREVENTION CODE REQUIREMENTS. ADDRESS NUMBERS SHALL BE 6" BLACK ALUMINUM FLOATING OR FLAT MODERN HOUSE NUMBERS 0-9 BY MONTAGUE METAL PRODUCTS, INC., COLOR: BLACK WITH 1.0 STROKE OR EQUAL.
20. KNOX BOX TO BE 3000 SERIES, RECESSED AND INSTALLED AT A MIN. HT. OF 5'-0" TO 6'-0" MAX. THE FIRE DEPT. ALERT DECAL IS TO BE MOUNTED ON THE DOOR OR FRAME OF BUILDING MAIN ENTRANCE. KEYS TO BE PLACED INTO THE KNOX BOX WILL BE DETERMINED BY SHERMAN, TX FIRE PREVENTION STAFF. ALL PER SHERMAN, TX FIRE DEPT. REQUIREMENTS.
21. EXHAUST VENT. REFER TO MECH DWG'S.
22. SUPERSHADE CANOPY BY MAPES WITH LOUVRES AND 12" SMOOTH FACE FASCIA.

KEYNOTES

EXTERIOR FINISH SCHEDULE

NO.	AREA	COATS	COLOR
1	EIFS MAIN COLOR	-	MATCH SW COLOR #7693, STONEBRIAR
2	EIFS ACCENT BAND	-	MATCH SW COLOR #7678, COTTAGE CREAM
3	EIFS WAINSCOT	-	MATCH SW COLOR #6097, STURDY BROWN
4	COPING / CORNICE	-	MATCH SW COLOR #6871, POSITIVE RED
5	EIFS SECONDARY COLOR	-	MATCH SW COLOR #6871, POSITIVE RED
6	GARAGE DOORS / DECORATIVE AWNING	-	DARK BRONZE, SEE MANUF. DRAWINGS

EXTERIOR FINISH SCHEDULE


Area

- EIFS Wainsscot Sturdy Brown
- EIFS Main Color Stonebriar

382.3SQFT
1,021.2SQFT

- EIFS Secondary Color Positive Red
- EIFS Accent Band


412.2SQFT
311.6SQFT

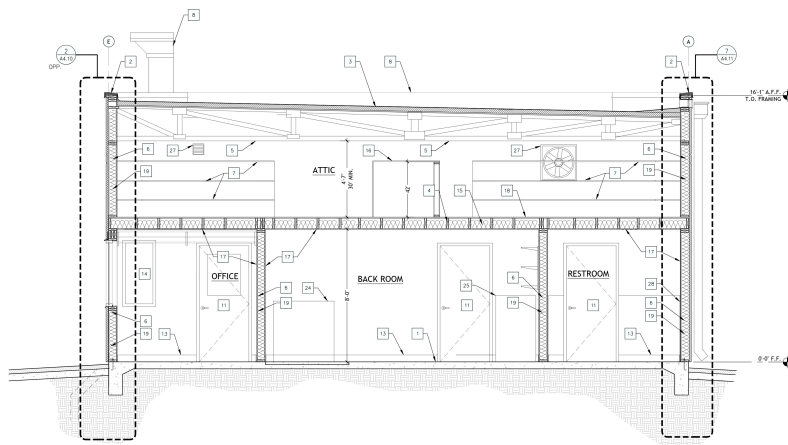

BUILDING SECTION

3/8" = 1'-0"

2

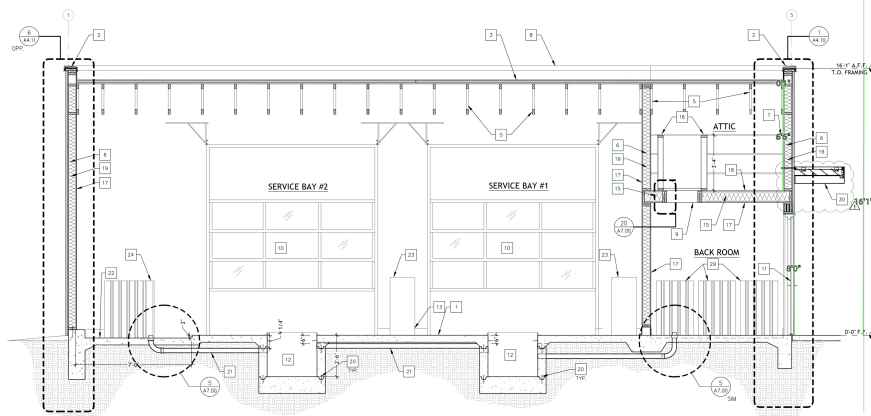

BUILDING SECTION

3/8" = 1'-0"

1

KEYNOTE DESCRIPTION

1. CONC. SLAB, REFER TO STRUCT. DWGS.
2. PARAPET METAL COPING.
3. TPO ROOFING MEMBRANE O/ RIGID INSULATION O/ PLYWOOD SHEATHING.
4. 2x WOOD JOISTS, REFER TO STRUCT. DWGS.
5. WOOD TRUSS, BY OTHERS.
6. R-19 BATT INSULATION AT WALLS.
7. SHELVING, (1) SHELVES @ 14" O.C. VERT.
8. BUILDING BEYOND.
9. ATTIC ACCESS LADDER.
10. ROLL-UP DOORS, REFER TO DOOR SCHED. A6.00.
11. DOOR, REFER TO DOOR SCHED. A6.00.
12. LUBE TRENCH, REFER TO SHEET A2.20.
13. VINYL BASE, REFER TO FINISH SCHED. A6.00.
14. WINDOW, REFER TO WINDOW SCHED. A6.00.
15. R-30 BATT INSULATION AT CEILING.
16. 1x6 WOOD CAP.
17. 1/2" PLYWOOD, PAINTED.
18. 3/4" PLYWOOD, PAINTED.
19. 2x WOOD STUDS @ 16" O.C.
20. CONT. WATERSTOP, CONTINUOUS AROUND TRENCH, REFER TO STRUCT. DWGS.
21. 3" DIA. PVC. USE SWEEPS AT TURNS.
22. 2" DEPRESSIONED SLAB AT OIL STORAGE AREAS.
23. WORK STATION, REFER TO EQUIP. SCHEDULE.
24. NEW OIL STORAGE TANK, REFER TO EQUIP. SCHEDULE.
25. COOLANT TANK, REFER TO EQUIP. SCHEDULE.
26. NOT USED
27. EXHAUST FAN. REFER TO MECH. DWGS.
28. FRP FINISH TO 48" A.F.F.
29. NEW USED OIL STEEL TANK, REFER TO EQUIPMENT SCHEDULE.
30. SUPERSHADE CANOPY BY MAPES WITH LOUVRES AND 12" SMOOTH FACE FASCIA.


KEYNOTES

3/8" = 1'-0"
A4.00

Length

Floor Height

37.1FT

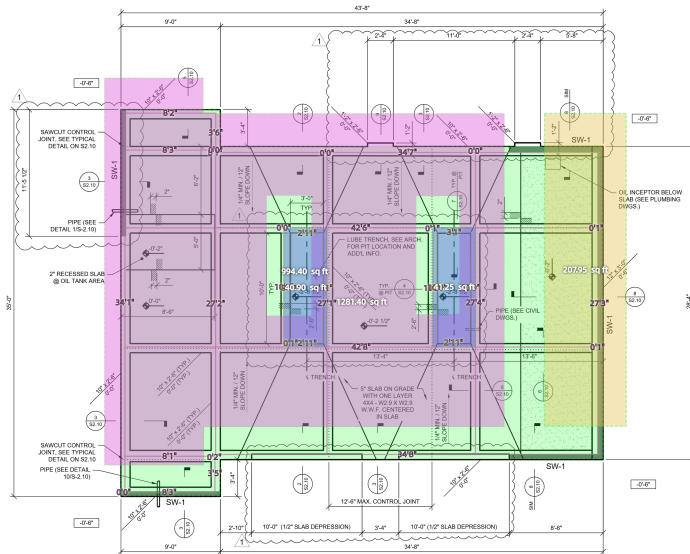

FOUNDATION PLAN

- NOTES:
- FLOOR CONSTRUCTION: 8" CONCRETE SLAB ON GRADE WITH ONE LAYER OF #4 W.B. PROVIDE 1/2" LAYER OF GRANULAR FILL BELOW SLAB (UNO).
 - RECESSED SLAB ON GRADE WITH #4 BARS @ 12" O.C. EACH WAY. PROVIDE 10 W.B. VARIOUS RETARDER AND 4 LAYER OF GRANULAR FILL BELOW SLAB (UNO).
 - TOP OF SLAB ON GRADE ELEVATION = "SLAB ON GRADE" SEE ELEVATION LEGEND. ELEVATIONS NOTED THUS (X-Y) ARE REFERENCED FROM "SLAB ON GRADE" ELEVATION.
 - TOP OF EXTERIOR FOOTING ELEVATION = (X-Y) (UNO).
 - CONTINUOUS FOOTINGS ARE MARKED THUS: WIDTH X DEPTH (TOP OF F.T.G. EL.).
 - PROVIDE (2) #4X4' LONG AT ALL REINTEGRANT CORNERS.
 - SEE ARCHITECTURAL DRAWINGS FOR EXTENT AND FINISH OF SLAB ON GRADE AND ANY FLOOR DEPRESSIONS, UNDER FLOOR CONCRETE, GRAINS, STAIRS, ETC.
 - SEE SHEETS 80-10, 80-11 & 80-12 FOR GENERAL NOTES.
 - SEE SHEET 82-10 FOR TYPICAL DETAILS.
 - XXX DENOTES PRESUMED FINISH GRADE AT LOCATION SHOWN. VERIFY VALUE WITH FINAL SITE PLAN AND NOTIFY ENGINEER OF ANY DISCREPANCIES.
 - SW-X DENOTES SHEAR WALL. SEE SHEET 84-10 FOR ELEVATIONS, SCHEDULES & DETAILS.
 - CONC. DENOTES CONCRETE CURB / STEM WALL.
 - CONC. DENOTES CONCRETE UNDER SHEAR WALL.
 - SEE HOLD-DOWN LOCATION WITH END POSTS AND HOLD-DOWN SIZES ON 84-10.

ELEVATION LEGEND

LEVEL DESIGNATION	ELEVATION (UNO)	PROJECT DATUM
T.B.R.G.	+13.4'	
PLATFORM JOIST BRG.	+7'-10.34'	
SLAB ON GRADE	0.0'	*

- ELEVATIONS ON PLAN MAY VARY FROM ELEVATIONS SHOWN IN THE ELEVATION LEGEND. SEE PLAN FOR SPECIFIC ELEVATION VARIATIONS.
- * DENOTES THE LEVEL THAT IS THE PROJECT DATUM.

Area Length

4" Granular Fill/

5" CONC. Slab

4-1/2" CONC. Ressed Slab

1,281.4SQFT

994.4SQFT

208.0SQFT

CONC. Slab Pits

Excavation Trench 10"x2'-6"/Footing


Lube Trench Edge

82.2SQFT

359.0FT

51.6FT




REINFORCING SIZE	LAP SPLICE
#4	24"
#5	30"



TRASH ENCLOSURE FOUNDATION PLAN
1/4" = 1'-0"

NOTES:

- **XXXX** DENOTES DUMPER SLAB CONSTRUCTION: 9" CONCRETE SLAB ON GRADE WITH AT 12" O.C. AND 4" LAYER OF GRANULAR FILL BELOW SLAB (UNO).
 - TOP OF EXTERIOR FOOTING ELEVATION = (+5-10') (UNO)
 - SEE SHEETS 50.10, 50.11, 50.12, & THIS SHEET FOR GENERAL NOTES.
 - SEE THIS SHEET FOR TYPICAL DETAILS.
 - **XXXX** DENOTES PRESUMED FINISH GRADE AT LOCATION SHOWN. VERIFY VALUE WITH FINAL SITE PLAN.
 - COORDINATE LOCATION AND EXTENT OF TRASH ENCLOSURE WITH ARCHITECT.
 - SEE SHEET S1.10 FOR ADDITIONAL PLAN NOTES.
- CONTINUOUS FOOTINGS ARE MARKED THUS: $\frac{\text{WIDTH} \times \text{DEPTH}}{\text{(TOP OF FTO. EL.)}}$



Area Length

Trash Enclosure Slab 138.9SQFT Trash Enclosure CONC. Footing 41.3FT

M-1

C-1.0





Area Count

Earth Work Area

18,840.3SQFT

Rip-Rap

1,113.2SQFT

Temporary CONC. Washout Facility

1EA

